

Model: HESP4DR

## DIN Rail Dataline Surge Suppressor

### Introduction

Model HESP4DR is designed to help protect against lightning strikes, power surges, and other types of voltage disturbances to components on a DIN rail. Five RS-422/485 signals on terminal blocks are supported with a clamping voltage of approximately 6.8 volts. The HESP4DR offers three stages of protection starting with a gas discharge tube followed by a series resistor and finally a Transient Voltage Suppressor (TVS).

In order for a surge protector to work properly it is important to have a good connection to earth ground. The HESP4DR has a #10 grounding screw, which provides a solid ground connection for the user. This design has been tested to two specifications at 6 kilovolts, IEC 1000-4-5: 1995 "Surge Immunity Test" and IEEE C62.41-1991 "IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits".

To ensure the best protection of your equipment some simple connection guidelines should be followed:

### Connections

1. The HESP4DR should be located as close as possible to the equipment being protected.
2. A good ground connection must be made between the HESP4DR and earth ground. This can be done with the #10 grounding screw.
3. The earth ground connection should be kept as short as possible for best performance. As a recommendation a minimum of 10 gauge copper wire of no more than 3 feet should be used. If it is not possible to achieve the short distance a braided cable made specifically for grounding purposes should be used.
4. The chassis ground of the equipment should be connected to the building's 3-prong plug ground.

### Specifications

•Clamping Voltage, stage one:	Min. 72 VDC, Max.108 VDC
•Series Resistance, stage two:	2.7 Ohms
•Clamping Voltage, stage three:	Min. 6.45V, Max. 7.14 V
•Clamping Time:	Less than $5 \times 10^{-9}$ seconds
•Connectors:	Two 6-position terminal blocks
•Temperature:	-40 to +80°C (-40 to +176°F)
•Humidity:	0-95% non-condensing
•Dimensions:	Approximately 35.5 x 78.8 x 105.3 mm (1.4 x 3.1 x 4.2 in)
•Weight:	Approximately .22 kg (.5 oz)

#### DECLARATION OF CONFORMITY

Manufacturer's Name: B&B Electronics Manufacturing Company  
 Manufacturer's Address: P.O. Box 1040  
 707 Dayton Road  
 Ottawa, IL 61350 USA  
 Model Numbers: HESP4DR  
 Description: DIN Rail Surge Suppressor  
 Type: Light industrial ITE equipment  
 Application of Council Directive: 89/336/EEC  
 Standards: EN 50082-1 (IEC 801-2, IEC 801-3, IEC 801-4)  
 EN 61000 (-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11)  
 ENV 50204



Robert M. Paratore, Director of Engineering



**B&B electronics**  
MANUFACTURING COMPANY

**International Headquarters:** 707 Dayton Road PO Box 1040 Ottawa, IL 61350 USA  
 815-433-5100 Fax 433-5104 [www.bb-elec.com](http://www.bb-elec.com) [orders@bb-elec.com](mailto:orders@bb-elec.com) [support@bb-elec.com](mailto:support@bb-elec.com)

**European Headquarters:** Westlink Commercial Park Oranmore Co. Galway Ireland  
 +353 91 792444 Fax +353 91 792445 [www.bb-europe.com](http://www.bb-europe.com) [orders@bb-elec.com](mailto:orders@bb-elec.com) [support@bb-europe.com](mailto:support@bb-europe.com)

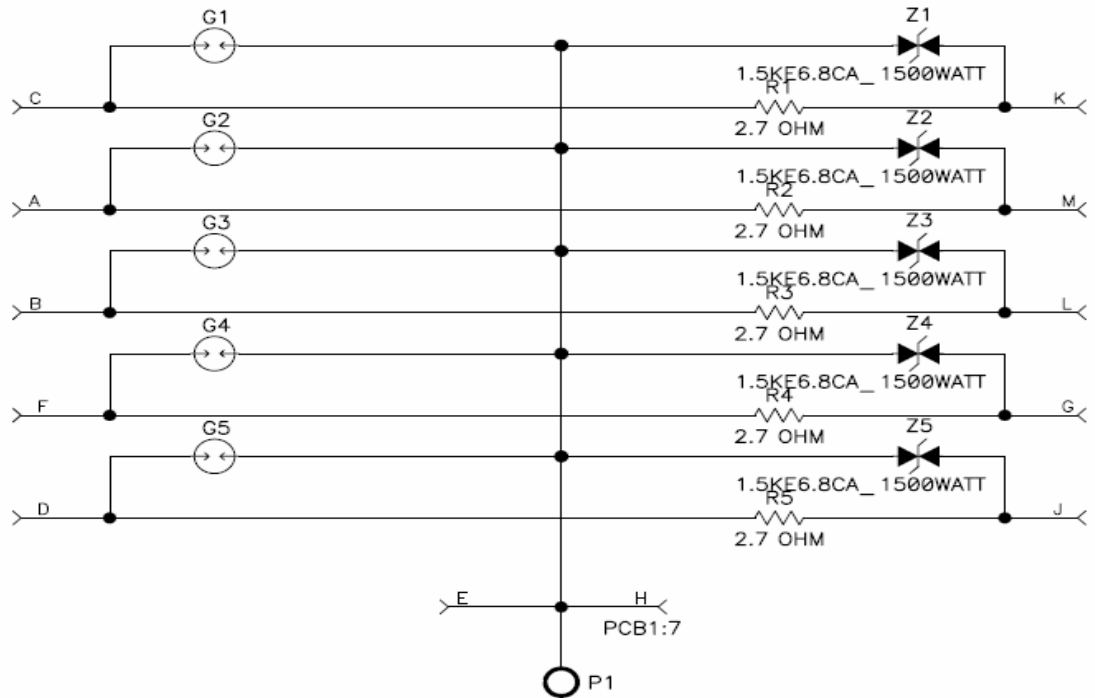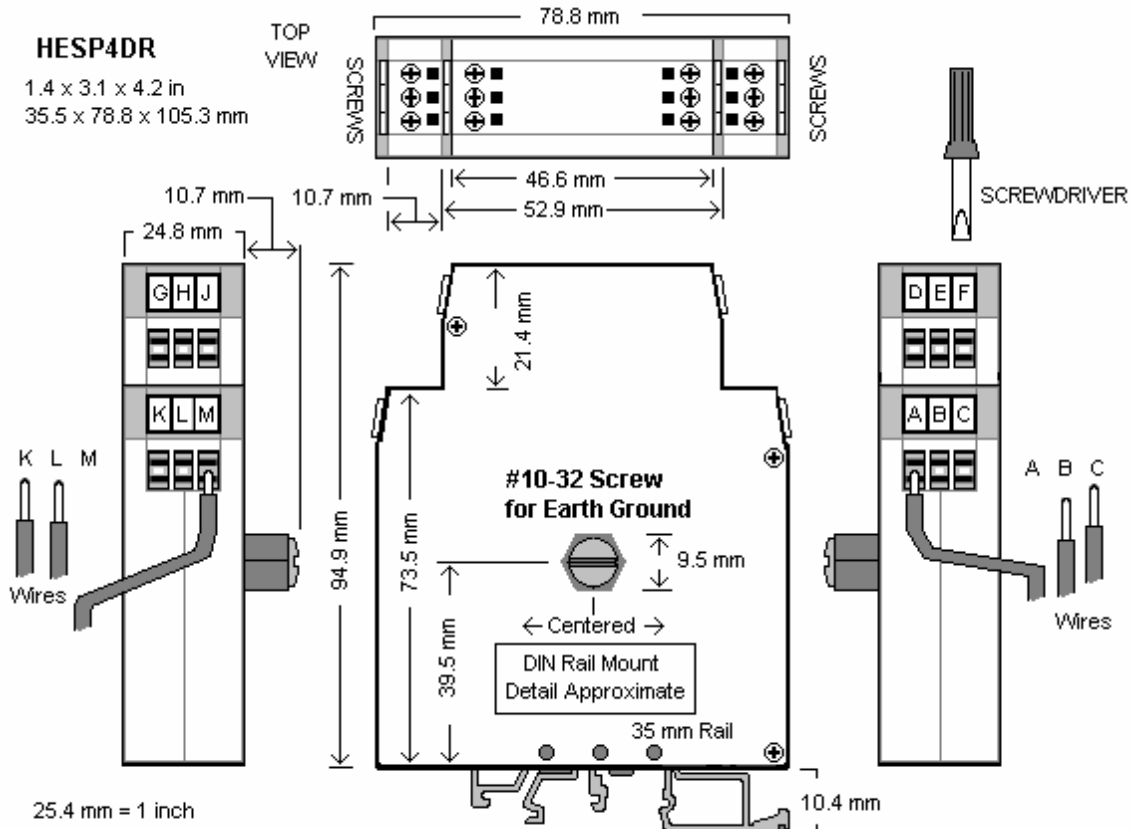

Contact



+57(1) 284 6932 - 284 6940

[www.andeswireless.com](http://www.andeswireless.com)

BOGOTA, COLOMBIA



**International Headquarters:** 707 Dayton Road PO Box 1040 Ottawa, IL 61350 USA  
815-433-5100 Fax 433-5104 [www.bb-elec.com](http://www.bb-elec.com) [orders@bb-elec.com](mailto:orders@bb-elec.com) [support@bb-elec.com](mailto:support@bb-elec.com)

**European Headquarters:** Westlink Commercial Park Oranmore Co. Galway Ireland  
+353 91 792444 Fax +353 91 792445 [www.bb-europe.com](http://www.bb-europe.com) [orders@bb-elec.com](mailto:orders@bb-elec.com) [support@bb-europe.com](mailto:support@bb-europe.com)